




GE Magnetic Contacts

1005 Series

Mini-Magnapull™ with Pull-Apart cords

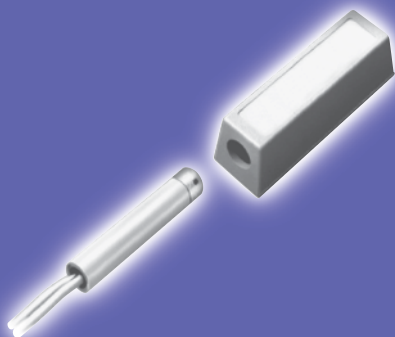

Model	Closed Loop	Form
1005	•	A

Quantity	10
-----------------	----

100% **TESTED**



604S

Connectors and Switches

1005-N




1005 Series

Mini-Magnapull™ with Pull-Apart cords

Installation Instructions

Switch — 1.50" L x .281" DIA.

Magnet — 1.969" x .641" W at the base, tapering to .609" W x .715" H at the top.

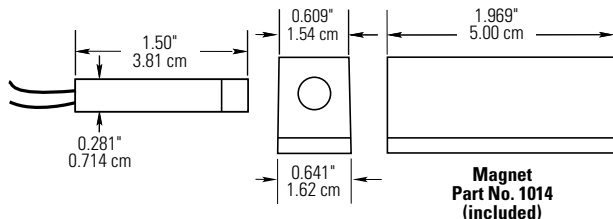

UL Specifications

Part Number	Loop Type	Lead Type	Mount	Color
1005	Closed	3 foot Zip Cord, 22 Gauge jacketed lead	Surface	N

*Gap specifications are nominal and may vary $\pm 20\%$ due to temperature. Gap specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

** European Union Specifications: 48 V AC/DC Max., 0.5 Amp

** FORM A (1005)

Voltage: 100 V AC/DC Max

Current: 0.5 A Max

Power: 7.5 W Max

CUL Specifications

All Contacts: 30 VDC, 50 mA max

Gap Specifications:* See UL Gap Specifications



GE Interlogix

www.GE-Interlogix.com

12345 SW Leveton Drive
Tualatin, OR 97062
Phone: 503-692-4052
USA & Canada: 800-547-2556
Technical Service: 800-648-7424
Faxback: 800-483-2495

2266 Second Street North
North St. Paul, MN 55109
Phone: 651-777-2690
USA & Canada: 800-777-5484