A large, thick, black square graphic is positioned on the left side of the page, partially overlapping the text.

TruVision IR Bullet Camera TVB-2201/TVB-4201 and TVB-2202/TVB-4202 Installation Guide

P/N 1072924 • REV A • ISS 10FEB15

Content

Product overview 2

Camera description 4

Installation 4

Specifications 6


Regulatory Information 7

Product overview


This is the TruVision IR Bullet Camera Installation Guide for models TVB-2201 / TVB-2202 / TVB-4201 / TVB-4202. This guide describes a standard installation.

Package contents:

- Camera with power and video output cables
- 3 M4 screws (3 x 25 mm) and 4 dry wall anchors (Ø7.5 x 24.5 mm) for wall or ceiling installation




- Template




- CD




- Installation Guide



- WEEE and Battery Disposal



Camera description

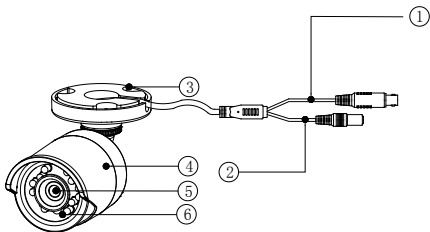

1. Video cable

2. Power cable

3. Mounting base

4. Sun shield


5. Lens

6. IR LED


Installation

To install the camera:


1. Using the template, place it level against the mounting surface and mark the position of the mounting holes.



2. Following all local codes, drill and prepare the mounting holes.
3. Securely fasten the mount to the mounting surface with the supplied screws.



4. Connect a 75-ohm coaxial video cable to the video cable and a 12 VDC power supply to the power cable.
5. Loosen the bracket screws and then adjust the camera position and angle as required.



6. Retighten the bracket screws.

Specifications

Power supply	12 VDC
Current	Max. 330 mA
Power consumption	1.8 W max. (Max. 4 W with IR cut filter on)
Weight	0.79 lb. (360 g)
Dimensions ($\varnothing \times L$)	2.76 x 5.89 in. (70 x 149.5 mm)

Regulatory Information

Copyright:

© 2015 United Technologies Corporation.

Interlogix is part of UTC Building & Industrial Systems, a unit of United Technologies Corporation. All rights reserved.

Trademarks and patents:

Trade names used in this document may be trademarks or registered trademarks of the manufacturers or vendors of the respective products.

Manufacturer:

Interlogix

2955 Red Hill Avenue, Costa Mesa, CA 92626-5923, USA

Authorized EU manufacturing representative:

UTC Fire & Security B.V.

Kelvinstraat 7, 6003 DH Weert, The Netherlands

Certification:



FCC compliance: Class A

Class A: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful

interference in which case the user will be required to correct the interference at his own expense.

ACMA compliance

Notice! This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Canada

This Class A digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe A est conforme à la norme NMB-0330 du Canada.

European Union directives:

12004/108/CE (EMC directive): Hereby, UTC Fire & Security declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2004/108/EC.



2002/96/CE (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info.

Contact information:

For contact information, see www.interlogix.com or www.utcssecurityproducts.eu.