




GE Magnetic Contacts

R1075 Series

3/8" Diameter Press Fit with Wire Leads

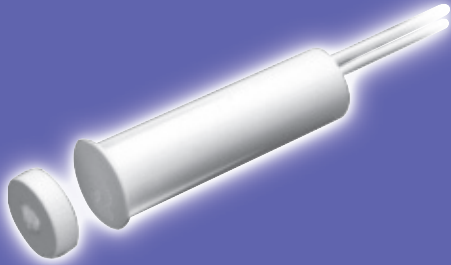

Gap Distance	Closed Loop
<i>1/2"</i>	<i>R1075</i>
Color	<i>White</i>
Quantity	<i>10</i>

100% TESTED



604S

Connectors and Switches

R1075-N



0 46188 06998 9

R1075 Mini-Max Magnetic Contacts

$\frac{3}{8}$ " Diameter Press Fit with Wire Leads

Installation Instructions

Switch

- 1: Drill $\frac{3}{8}$ " dia. hole $1\frac{1}{8}$ " deep for the contact.
- 2: Connect contact leads to security system loop and test for continuity.
- 3: Lightly coat the contact RTV mounting compound (Sentalor part number 1905) and insert into hole.

Magnet


- 1: Mount magnet to double-sided tape (included) and affix to window frame.
- 2: Or, if using stainless steel screw (included), drill $1\frac{1}{16}$ " dia. (using magnet center hole as a guide) and mount using #4 x $1\frac{1}{2}$ " stainless steel screw (included). Use caution if using screw other than the one provided, as it will effect the gap performance.
- 3: Care should be taken not to over tighten screw to avoid damaging magnet or stripping hole.

Recess/Flush Mount Magnet

- 1: Drill $\frac{7}{16}$ " dia. by approximately $1\frac{1}{8}$ " deep.
- 2: Coat magnet with RTV silicon adhesive and mount into hole.

NOTE: When surface mounting magnet be sure there is enough clearance to prevent the magnet from becoming damaged when closing the window or door.

Standard Gap

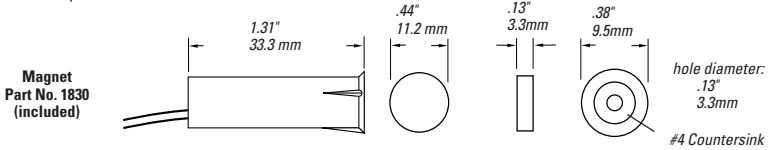

C-UL-US Specifications

Part Number	Loop Type	Electrical Configuration	Gap Distance
R1075	Closed	N/O	$\frac{1}{2}$ "

** European Union Specifications: 48 VAC/DC Max., 0.5 Amp

** FORM A (R1075)

Voltage: 100 VAC/DC Max

Current: 0.5 A Max

Power: 7.5 W Max

WARNING: Each electrical rating is an individual maximum and cannot be exceeded!

ULC Specifications

All Contacts: 30 VDC, 50 mA max

Gap Specifications:*



GE Interlogix

www.GE-Interlogix.com

12345 SW Leveton Drive

Tualatin, OR 97062

Phone: 503-692-4052

USA & Canada: 800-547-2556

Technical Service: 800-648-7424

Faxback: 800-483-2495

2266 Second Street North

North St. Paul, MN 55109

Phone: 651-777-2690

USA & Canada: 800-777-5484

Technical Service: 800-777-2624