



# TruVision TVT-2101/ TVT-4101 IR Turret Camera Installation Instructions

Figure 1: Parts of the camera

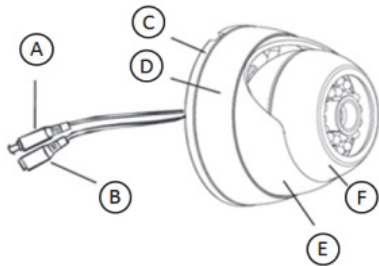

- |                     |               |
|---------------------|---------------|
| A. Video cable      | D. Fixed ring |
| B. Power cable      | E. Shroud     |
| C. Mounting bracket | F. Camera     |

Figure 2: Camera front



LED IR lights; B. Lens; C. Light sensor

## Overview

These are the TruVision IR Turret Camera installation instructions for TVT-2101/4101. The instructions describe a standard installation.

The camera consists of the following:

- Camera with power and video output cables
- Camera shroud
- Fixed ring to secure the camera and camera shroud to the mounting bracket
- One dual-power terminal block with its screw and anchor
- 4 anchors and 4 screws for wall or ceiling installation

Refer to Figures 1 and 2 when performing the camera setup procedures.

## Installation

When installing the camera, please use the mounting bracket as a template.

To install the camera:

1. Unscrew the fixed ring and shroud assembly from the camera.
2. Using the mounting bracket as a template, place it level against the mounting surface and mark the position of the mounting holes.
3. Following all local codes, drill and prepare the mounting holes.
4. Route the camera's cable through the mounting bracket, and then install the mounting bracket with the four provided screws. If your mounting surface requires it, use the provided wall anchors or other appropriate fasteners.
5. While holding the camera in position, place the fixed ring and shroud over the camera and tighten.
6. Adjust the camera position.
7. Connect a 75-ohm coaxial video cable to the camera's video cable, and connect a 12 VDC power supply to the power cable.




**Note:** When installing the camera, tilting the camera housing past 80° may result in reflection of IR illumination from the camera base into the lens. This can distort or obscure the picture in night mode.

8. Check the picture and adjust the camera position and angle as required.
9. Tighten the fixed ring to secure it to the mounting bracket. Ensure that the camera shroud is firmly attached to the bracket.

## Specifications

Power supply	12 VDC
Current	80 mA (IR Off) 200 mA (IR On)
Power consumption	2.4 W max.
Weight	0.86 lb. (390 g)
Dimensions (H x Ø)	2.7 x 3.7 (69 x 94 mm)

## Regulatory information

Manufacturer	United Technologies Corporation. 2955 Red Hill Avenue, Costa Mesa, CA 92626 5923, USA  Authorized EU manufacturing representative: UTC Climate Controls & Security B.V. Kelvinstraat 7, 6003 DH Weert, The Netherlands
FCC compliance	<p>Class B: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.</p> <p>There is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"><li>• Reorient or relocate the receiving antenna.</li><li>• Increase the separation between the equipment and receiver.</li><li>• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li><li>• Consult the dealer or an experienced radio/TV technician for help.</li></ul>
Certification	  N4131
European Union directives	12004/108/EC (EMC directive): Hereby, UTC Climate Controls & Security declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2004/108/EC.
	2002/96/EC (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: <a href="http://www.recyclethis.info">www.recyclethis.info</a> .
Copyright	© 2013 United Technologies Corporation. Interlogix is part of UTC Climate Controls & Security, a unit of United Technologies Corporation. All rights reserved.
Trademarks and patents	Trade names used in this document may be trademarks or registered trademarks of the manufacturers or vendors of the respective products.

## Contact information

For contact information, see [www.interlogix.com](http://www.interlogix.com) or [www.utcssecurityproducts.eu](http://www.utcssecurityproducts.eu).