


Recessed Press Fit Magnetic Contact with Wire Leads

1015 Series

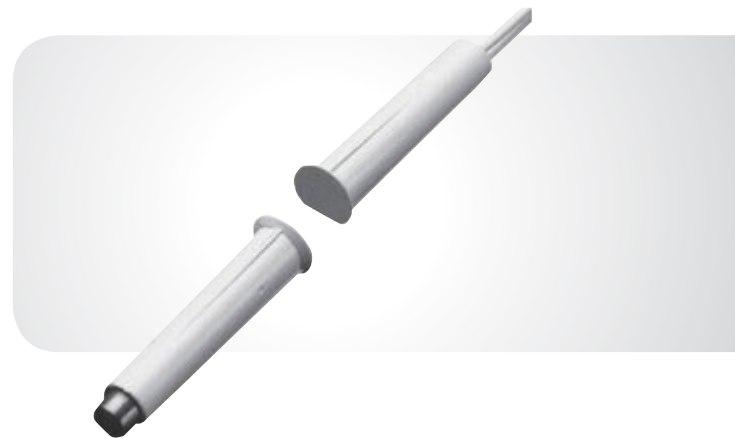

OVERVIEW

The 1015 series magnetic contact is designed with a flat side on the surface of the contact, which allows a flush fit on narrow surfaces.


The contact is recommended for use with casement windows, awning windows, and other areas where the contact must recess and fit into a narrow surface. It installs quickly in a 1/4-inch diameter hole. Small fins on the housing of the magnet and switch eliminate the need for glue.

These high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Rated at 10,000,000 cycles, every reed connection is hand soldered and each magnetic contact is 100% tested before leaving the factory.

Specifications

Voltage	100 VAC/VDC max.
Current	0.5 A max.
Power	7.5 W max.
Loop type	Closed
Electrical Configuration	Normally open
Gap Distance	Up to 3/8 in. (10mm)
Lead Type	1 ft. (30cm) #22 wire
Housing	Flame retardant ABS plastic
Color	White
Regulatory	UL634, ULC/ORD-C634

Dimensional Diagram

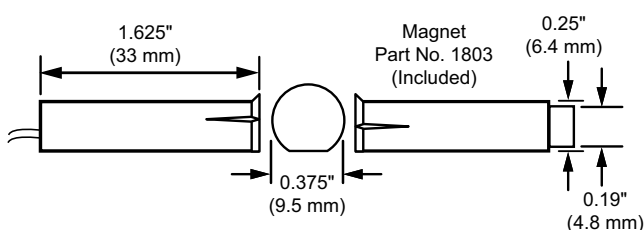

STANDARD FEATURES

- Press fit design makes installation easy — no screws or glue needed
- Attractive, added security of recessed installation
- Flat-sided head for use in limited spaces
- 1/4-inch diameter
- UL/ULC Listed

Ordering Information

1015-N	Recessed Contact w/Wire Leads, 1/4" Diameter, 3/8" Gap Size, White
--------	--