



SENTROL

1072 Series 3/8" Diameter Flanged with Wire Leads Magnetic Contacts

Gap distance	Closed loop
Regular Up to 1/2"	1072

Color	Natural
-------	---------

Quantity	10
----------	----



1072-N



100% TESTED



1072 Series 3/8" Diameter Flanged with Wire Leads Magnetic Contacts

Installation Instructions


General

Drill 3/8" diameter hole, press in, secure with screws through flange holes.


Magnet (1057)

Slightly overdrill 3/8" diameter hole. Coat magnet with RTV Mounting Compound (Sentrol part number 1905), press into hole.

1072 Series

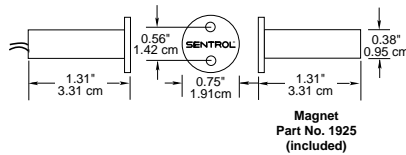

Mounting Positions



UL Specifications

Part Number	Loop Type	Electrical Configuration	Gap Distance Make* (Up to)
1072	Closed	N.O.	1/2"

FORM A (1072)
Voltage: 100 VAC/DC Max
Current: 0.5 A Max
Power: 7.5 W Max

* Gap Specifications are nominal and may vary $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.



PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.

Interlogix, Caddx, ESL, ITI and Sentrol are trademarks of Interlogix, Inc.

PK-0983 Rev E 10/01