

SENTROL 3555 SERIES Bill Trap

Installation Instructions

The 3555 Series Bill Trap is a dry contact that draws no power and is wireless compatible.

To install the unit, clean both the underside of the Bill Trap and the bottom of the cash register drawer or tray with alcohol. Adhere the Bill Trap to the appropriate surface with the adhesive tape provided. Run the switch leads out the back of the cash register drawer by drilling a 1/4" hole and attaching the leads to a service loop. Or, the leads may run over the top of the drawer, depending on the amount of clearance.

Warning:

Do not overextend the lid by more than one inch. Doing so may cause the Bill Trap to malfunction.

Special Instructions for Mounting the Bill Trap on Steel

The performance of the Bill Trap may be adversely affected if the unit is mounted on steel. For this reason, two additional strips of double-sided tape have been included. If you experience difficulties when mounting your Bill Trap on steel, apply these two pieces of double-sided tape onto the existing tape prior to mounting.

Form C


Voltage.....30 V MAX

Current.....0.25 A MAX


Power.....3.0 W MAX

Cycles.....10,000,000

Bill Trap With Bill Inserted

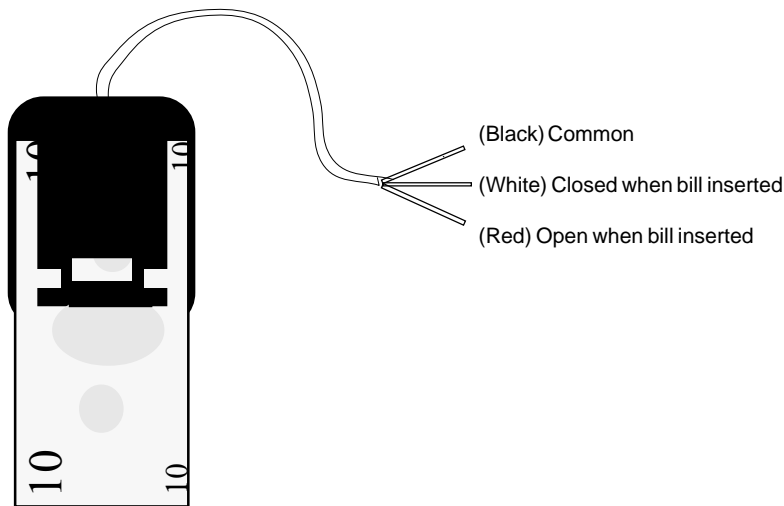

Wiring Diagram

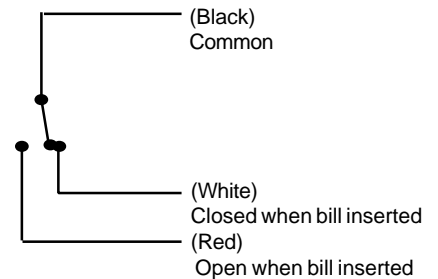

Ordering Information

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIGURATION	COLOR CHOICES	LEAD TYPE
3555	Open or Closed	SPDT	Black	#22 gauge 6" wire



PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixinc.com

SECURITY & LIFE SAFETY GROUP

CADDX | ESL | GBC | ITI | KALATEL | SENTROL

©2001 Interlogix, Inc.

Interlogix, Caddx, ESL, ITI and Sentrol are trademarks of Interlogix, Inc.

All other trademarks are properties of their respective owners.