


DE7200M Series

IFS 10/100 Mbps Ethernet
Mini 2 Port Media Converter

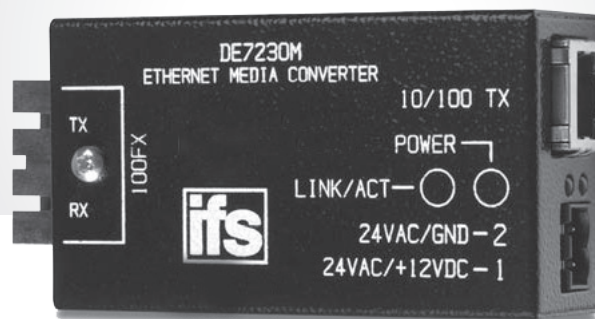

OVERVIEW

The IFS DE7200M Series Ethernet 2 port media converter is designed to transmit and receive 10/100 Mbps data over multimode or single mode optical fiber. The IFS DE7200M Series will function as a 10 Mbps Ethernet link, or as a 100 Mbps Ethernet link without any adjustments. The DE7200M Series is environmentally hardened to operate in extreme temperatures. Status indicating LED's for power and data rate are present at the RJ-45 connector. At the fiber optic transceiver end, link and data LEDs provide operational status. Plug-and-play design ensures ease of installation requiring no optical adjustments. The modules are available in stand-alone only.


APPLICATION EXAMPLES

- 10/100 Mbps Ethernet
- High Speed Computer Links

STANDARD FEATURES

- 10/100 Mbps Ethernet
 - 100 FX Optical Port
 - 10/100 Selectable
 - Full Duplex or Half Duplex Data
- Supports Auto MDI/MDI-X
- Distances up to 45 km (28 miles)
- NTCIP Compatible
- Designed to Meet Full Compliance with the Environmental Requirements (Ambient Operating Temperature, Mechanical Shock, Vibration, Humidity with Condensation, High-Line/Low-Line Voltage Conditions and Transient Voltage Protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Multimode and Single Mode Versions Available
- SC Optical Connectors Standard
- No In-field Electrical or Optical Adjustments Required
- Power, Transmit and Receive Data Status LED Indicators
- IEEE 802.3 Compliant
- Comprehensive Lifetime Warranty

SYSTEM DESIGN

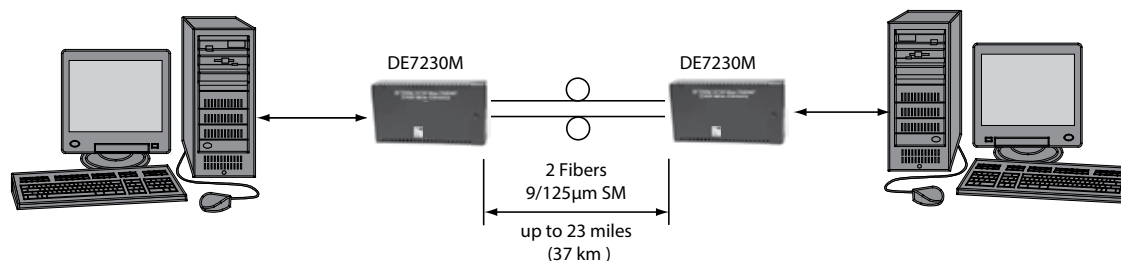

DE7200M Series

North America
T 855-286-8889

Latin America
T 561-998-6114

IFS 10/100 Mbps Ethernet Mini 2 Port Media Converter

Ordering Information

	Part Number	Description	Fibers Required	Optical Pwr. Budget	Max. Distance*
Multimode 62.5/125µm**	DE7210M	10/100 Mbps Ethernet (1310 nm)	2	10 dB	1.2 miles (2 km)
	DE7210MWDMA↔	10/100 Mbps Ethernet (1310 /1550 nm)	1	8 dB	1.2 miles (2 km)
	DE7210MWDMB	10/100 Mbps Ethernet (1550/1310 nm)	1	8 dB	1.2 miles (2 km)
Single Mode 9/125µm	DE7230M	10/100 Mbps Ethernet (1310 nm)	1	15 dB	23 miles (37 km)
Accessories ♦	PS12VDC1.5A-U	12VDC, 1.5A Plug-in Power supply (110/220VAC) with Universal power plug adapter kit (Included)			

*Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels. Distance can also be limited by fiber bandwidth. **For 50/125 Fiber, subtract 4 dB from Optical Power Budget.

♦ All accessories are third party manufactured. ↔WDMA must mate with a WDMB

Specifications

Data

Data Interface:	Ethernet
Data Rate:	10/100 Mbps, IEEE 802.3 Compliant
Operating Mode:	Full Duplex or Half Duplex

Wavelength

DE7210M:	1310 nm, MM
DE7210MWDM:	1310/1550 nm, MM
DE7230M:	1310 nm Single Mode

Number Of Fibers

	1 or 2
--	--------

Connectors

Power:	Terminal Block with Screw Clamps
Optical:	SC
Data:	RJ-45

Electrical & Mechanical

Power:	24 VAC @ 110 mA 12 VDC @ 200 mA
Voltage Regulation:	Solid-state; independent on each board
Current Protection:	Automatic Resettable Solid-State Current Limiters
Circuit Board:	Meets IPC Standard
Size (in./cm.) (LxWxH)	
Surface Mount:	1.0 x 2.0 x 3.5 in., 2.5 x 5.1 x 8.9 cm
Shipping Weight:	< 2 lbs./0.9 kg

Environmental

MTBF:	> 100,000 hours
Operating Temp:	-40° C to +74° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)

Agency Compliance

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J



interlogix.com

Specifications subject to change without notice.

© 2013 United Technologies Corporation
All rights reserved.

Interlogix is part of UTC Building & Industrial Systems,
a unit of United Technologies Corporation.

DE7200M Series