

# Overhead Door Magnetic Contacts

## 2202 Series

### OVERVIEW

The Interlogix 2202 Series overhead door magnetic contact is for use in the rigorous environments of commercial and industrial installations.

The floor mount units are constructed with a low profile heavy cast aluminum housing. The reed switch assembly is fully encased in Interlogix's exclusive polyurethane potting material to prevent damage due to moisture or humidity. A wide operating gap distance of up to 3 inches makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

The 2202 Series is available with a universal style magnet that allows for greater installation flexibility.



### STANDARD FEATURES

- Wide 3-inch operating gap
- Fully sealed switch
- Form C unit available
- Mounting hardware included

# Overhead Door Magnetic Contacts

North America  
T 855-286-8889

Asia  
T 852-2907-8108

Australia  
T 61-3-9239-1200

Europe  
T 32-2-725-11-20



Latin America  
T 561-998-6114

## 2202 Series

### Specifications

Electrical	2202	2204
Voltage	100V AC/DC (supplied by control panel)	30V AC/DC (supplied by control panel)
Current	0.5A maximum	0.25A maximum
Power	7.5W maximum	3.0W maximum
<b>Features</b>		
Loop type	Closed	Open or closed
Electrical configuration	Normally open	SPDT
Gap distance	Up to 3 inches	
Lead type	18 inch flexible stainless steel cable	
Lead colors		common; white - closed loop (N.O.); red - open loop (N.C.)
<b>Physical</b>		
Dimensions 2202A (LxWxD)	3.50 x 1.50 x 1.50 in. (89 x 38 x 38 mm)	
Dimensions 2202AU and 2204AU (LxWxD)	3.125 x 2.125 x 0.81 in. (79 x 54 x 21 mm)	
Construction	Cast aluminum	
Color	Aluminum	
Regulatory	C-UL-US	

### Dimensional Diagram

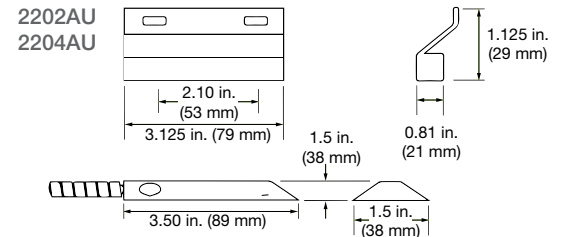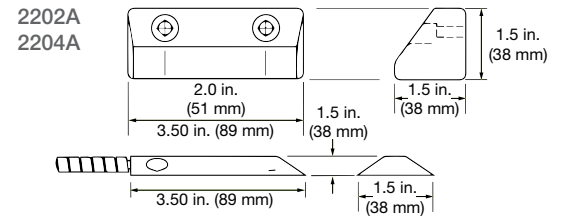

### Ordering Information

<b>2202A-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Aluminum Housing, 3 in. Gap Size, Closed Loop, Includes 18 in. Stainless Steel Armored Cable
<b>2202AU-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Universal Magnet, 3 in. Gap Size, Closed Loop, Includes 18 in. Stainless Steel Armored Cable
<b>2204A-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Aluminum Housing, 3 in. Gap Size, SPDT, Includes 18 in. Stainless Steel Armored Cable
<b>2204AU-L</b>	Floor-mount Magnetic Contact for Overhead Doors, Universal Magnet, 3 in. Gap Size, SPDT, Includes 18 in. Stainless Steel Armored Cable



interlogix.com

Specifications subject to change without notice.

© 2013 Interlogix.  
All rights reserved.  
Interlogix is part of UTC Climate, Controls & Security,  
a unit of United Technologies Corporation.

306-3683 2013/07 (75101)