

www.GESecurity.com

KTS-55

Alphanumeric Message Generator

Overview

The KTS-55 Alphanumeric Message Generator superimposes alphanumeric titles or messages on composite video for display on a monitor screen. The unit features dry contact inputs allowing four additional messages to be displayed, such as door status or alarm condition. A jumper for selecting either NTSC or PAL video is also provided.



Standard Features

- **On-screen alphanumeric display**
- **Dry contact inputs for displaying additional status messages**
- **NTSC or PAL compatible**



KTS-55

Alphanumeric Message Generator

Specifications

Electrical

- Input voltage: 9 VAC
- Input power: 2 VA

Video

- Inputs: 1
- Outputs: 1
- Bandwidth: 32 MHz at -1.5 dB, 50 MHz at -3 dB
- Signal/noise: -60 dB (RMS rel. 1V p-p)
- Gain: 0 dB \pm 1 dB
- Impedance: 75 ohm, Input and Outputs

Controls

- Buttons: 4 Momentary Mini-Keys Used to Enter Alphanumeric Text


Connections

- Power, RS422, dry contact inputs: 9 Position Removable Terminal Strip
- Video: BNC Connectors

Mechanical

- Weight: 5.6 oz (159 g)
- Material: 0.050 in (1.27 mm) aluminum
- Finish: Clear anodized

Related Diagram

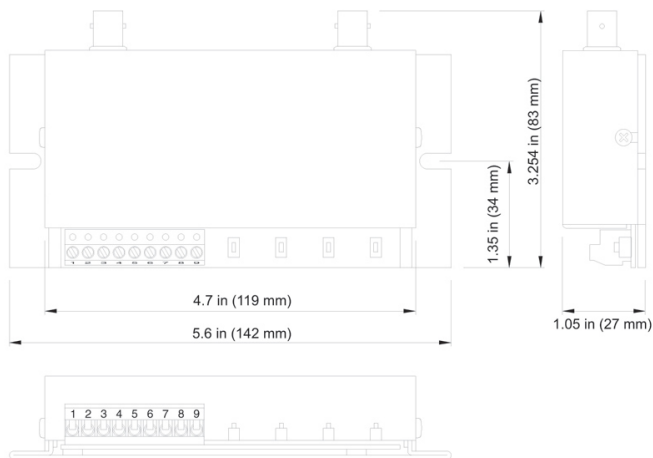

Ordering Information

KTS-55



GE Security

Mailing Address
4575 Research Way, STE 250
Corvallis, OR 97333 USA
www.GESecurity.com

Americas
800-469-1676 (US only)
tel 541-754-9133
fax 541-754-7162

Asia
tel 852-2907-8108
fax 852-2142-5063
Australia
tel 61-3-9259-4700
fax 61-3-9259-4799

Europe
tel 32-2-725-11-20
fax 32-2-721-86-13
Latin America
tel 305-267-4301
fax 305-267-4300

www.GESecurity.com