

HIGH POWERED SIREN SPEAKERS

MPI-30

SPECIFICATIONS

MOOSE

APPLICATION


A high power siren speaker noted for its high quality and loudness. With a swivel mounting bracket and front mounting holes the MPI-30 can be used for virtually any application requiring wide angle sound dispersion with plenty of volume.

SPECIFICATIONS

- Sound Pressure Level 30 Watts At 4 Feet — 125 dB In Anechoic Environment
- Voice Coil Impedance 8 Ohms
- Dimensions:
 - (1) 11 Inches High (280 mm)
 - (2) 6½ Inches Wide (165 mm)
 - (3) 8½ Inches Deep (216 mm)
- Swivel Base Or Flush Mounting
- Impact Resistant Molded Housing
- Net Weight: 4 Pounds — 1 Ounce
- 90 To 120 Degree Dispersion Angle
- Single Wing Nut Positioning
- Weather Resistant
- Frequency Response: 275 To 14,000 Hz
- Terminal Connection: 12 Inch (305 mm) Minimum
- Closed Circuit Tamper Loop

FEATURES

- 30 Watt
- Durable Plastic
- Beige Color
- Front Mount Holes
- Adjustable Mounting Foot
- Dependable
- Extended Frequency

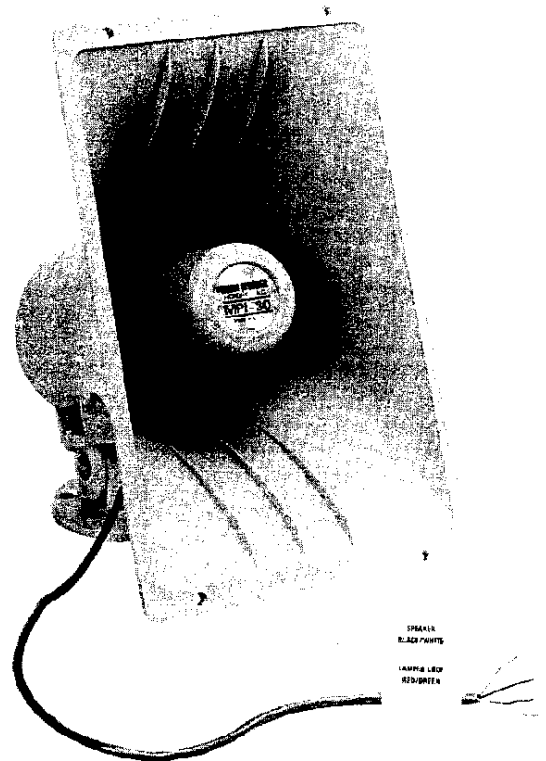

L1500

COPYRIGHT 1985 MOOSE PRODUCTS, INC.

Printed in U.S.A. 9 85

1510 Tate Boulevard, S.E. • P.O. Box 2904
Hickory, N.C. 28603 U.S.A. • Phone (704) 322-2333
Toll Free (800) 438-8175 • Telex 802-111



moose products inc.