

[www.GESecurity.com](http://www.GESecurity.com)

## **MVC-19HR**

*High Resolution Color Monitor*

### **Overview**

GE Security's MVC-19HR offers 800 TV lines of resolution and a 19-inch actual viewing area. When viewing images from 16 cameras at one time, each view appears in an area that is 4.75 inches from corner to corner.

The MVC-19HR is rack-mountable, is housed in a durable metal cabinet, and includes a built-in speaker. Front panel controls and an onscreen display make the MVC-19HR easy to operate. It has two BNC video inputs and one Y/C video input.

The MVC-19HR's looping video inputs are self-terminating. This enables you to use the MVC-19HR by itself or daisy chain it with additional monitors or other CCTV equipment.

### **Outstanding Features**

The MVC-19HR includes a built-in three-channel switcher. The monitor sequences through all connected cameras automatically. You can also call up cameras manually using the front panel controls.

The MVC-19HR's universal 100 VAC to 240 VAC power input draws 80 W of power. Its NTSC and PAL compatible scanning system automatically detects camera video format. The monitor operates effectively in temperatures ranging from 14° to 194° F (-10° to 50° C).



### **Standard Features**

- **19-inch viewing area**
- **High resolution: 800 TV lines**
- **Rack-mountable metal cabinet**
- **Front panel controls and onscreen display**
- **Built-in three-channel manual switcher**
- **Built-in microprocessor digital control**
- **Self-terminating, looping video inputs**
- **Built-in speaker**
- **Universal power supply: 100 to 240 VAC**
- **NTSC/PAL compatible**

# MVC-19HR


High Resolution Color Monitor

## Specifications

### MVC-19HR 19-inch Color Monitor

- CRT: 19 in 0.27 mm color CDT
- Input power: 100 to 240 VAC, 50/60 Hz
- Power consumption: 95 W (max)
- Video input composite: Composite video 1.0 V pk-pk at 75 ohm load
- Scanning frequency: 15.734 KHz / 60 Hz (NTSC), 15.625 KHz / 50 Hz (PAL)
- Resolution: > 800 TVL (center)
- Video connectors: Video BNC in x 2, Y/C in x 1, Video BNC out x 2, Y/C out x 1
- Weight: 55.11 lb (25 kg)
- Operating temperature: 14° to 194° F (-10° to 50° C)
- Humidity: 10 to 90 percent

## Related Diagram

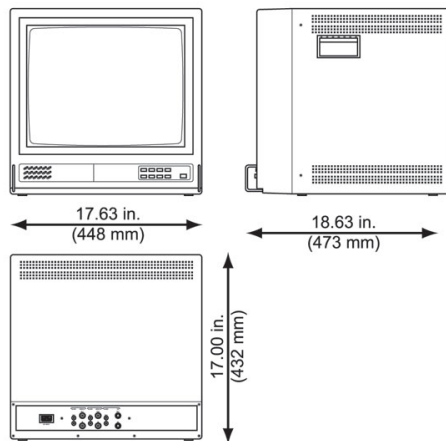

## Ordering Information

**MVC-19HR**



**GE Security**

Mailing Address  
4575 Research Way, STE 250  
Corvallis, OR 97333 USA  
[www.GESecurity.com](http://www.GESecurity.com)

Americas  
800-469-1676 (US only)  
tel 541-754-9133  
fax 541-754-7162

Asia  
tel 852-2907-8108  
fax 852-2142-5063  
Australia  
tel 61-3-9259-4700  
fax 61-3-9259-4799

Europe  
tel 32-2-725-11-20  
fax 32-2-721-86-13  
Latin America  
tel 305-267-4301  
fax 305-267-4300

[www.GESecurity.com](http://www.GESecurity.com)