


15-inch Color Monitor



The MVC-15HS features on-screen display for convenient adjustment of tint, color, brightness, volume, and contrast.

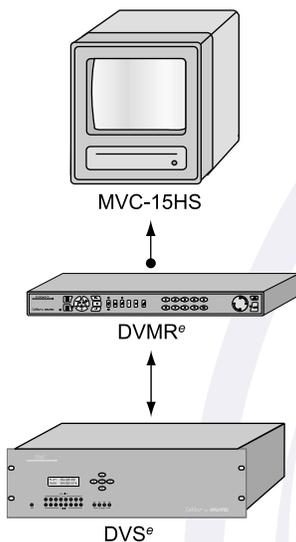

The MVC-15HS is a 15-inch color monitor that offers 800 lines of resolution. The model features multi-language, on-screen display (OSD) for convenient adjustment of tint, color, brightness, volume, and contrast. The monitor also features auto loop-through and a built-in speaker.

The MVC-15HS incorporates a universal power supply that accepts 100 to 240 VAC power input. The monitor is also NTSC/PAL compatible.

Features

- 800 lines of resolution
- Microprocessor digital control
- On-screen display operating controls
- Universal power supply 100 to 240 VAC, 50/60 H
- Dual scanning system, NTSC and PAL



GE Interlogix

Product
Specification

Technical Specifications

CRT

15 inch color
0.27 mm CDT

Input Power

100 to 240 VAC
50/60 Hz (auto switch)

Power Consumption

95 W max.

Video Input

Composite video 1.0 V pk-pk at 75 Ω load

Scanning Frequency

Dual Scanning Frequency, Auto Detect
15.750 KHz / 60 Hz (NTSC)
15.625 KHz / 50 Hz (PAL)

Resolution

800 lines

Video Connectors

BNC in/out x 1 set

Audio Connectors

RCA in/out x 1 set

YC Connectors

YC in/out x 1 set

Weight

33 lb (15 kg)

Temperature

14 to 122 °F (-10 to 50 °C)


Humidity

10 to 90 percent

Optional Accessories

KTM-RK-15C 19-inch rack-mount adapter

Dimensions

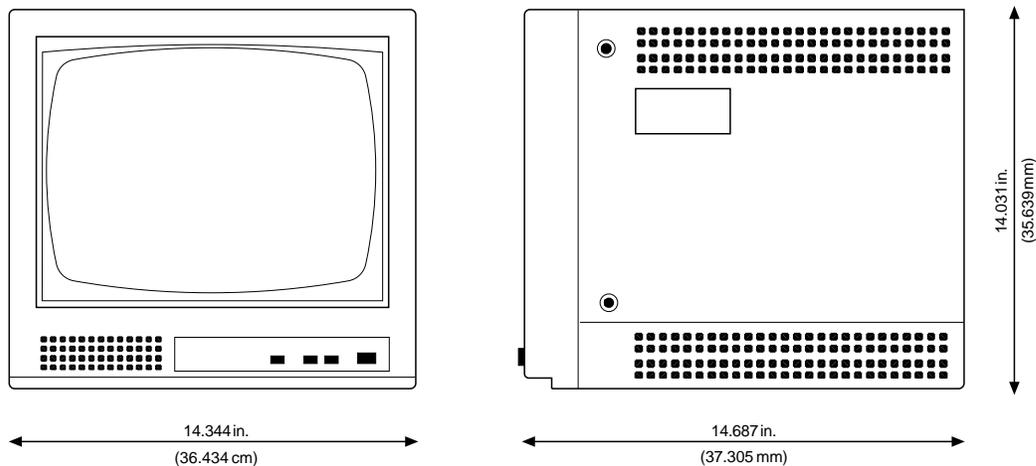

GE Interlogix

MAILING ADDRESS
Kalatel
4575 Research Way, STE 250
Corvallis, OR 97333 USA
www.GE-Interlogix.com

AMERICAS
800-469-1676 (US only)
tel 541-754-9133
fax 541-754-7162

ASIA
tel 852-2907-8108
fax 852-2142-5063

AUSTRALIA
tel 61-3-9259-4700
fax 61-3-9259-4799

EUROPE
tel 32-2-725-11-20
fax 32-2-721-86-13

LATIN AMERICA
tel 561-912-5321
fax 561-994-6224