




SENTROL

1275 Series 3/8" Diameter Wing-Fit Recessed With Wire Leads Magnetic Contacts

Gap distance	Closed loop	SPDT
Regular 1/2"	1275	1277
Wide 1"	1275W	1277W

Color	White	Mahogany brown
Quantity	10	

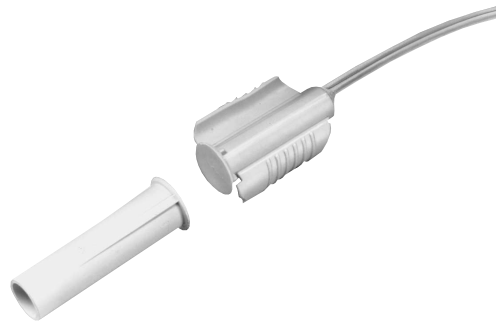

1275-N



100% TESTED




0 46188 02018 8

1275 Series Press Fit Magnetic Contacts

Installation Instructions

Drill 3/8" x 1 3/8" holes for switch and magnet. Test for continuity; connect switch into loop. Press switch and magnet into their respective holes.

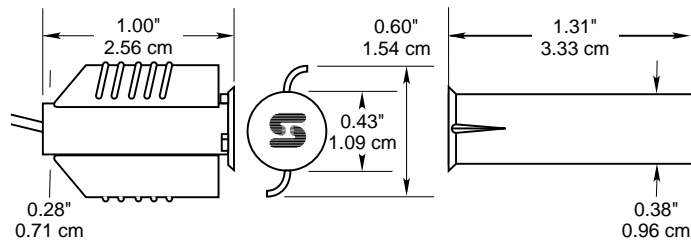

* Note: Wings compress to .375" dia. Magnet Part No. 1924 (Included)

UL Specifications

**European Union Specifications: 48 VAC/DC Max., 0.5 Amp

Part Number	Loop Type	Electrical Configuration	Gap Distance (Up To)*
1275	Closed	N.O.	1/2"
1275W	Closed	N.O.	1 1/4"
1277	Open or Closed	SPDT	1/2"
1277W	Open or Closed	SPDT	1 1/4"

**FORM A (1275, 1275W)

Voltage: 100 VAC/DC Max
Current: 0.5 A Max
Power: 7.5 W Max

FORM C (1277, 1277W)

Voltage: 30 VAC/DC Max
Current: 0.25 A Max
Power: 3.0 W Max

* Gap Specifications are nominal and may vary $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.



PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.

Interlogix, Caddx, ESL, ITI and Sentrol are trademarks of Interlogix, Inc.

PK-0990 Rev F 10/01