



# SENTROL

## 1045T Series Industrial Surface Mount With Terminals Magnetic Contacts

Gap distance	Closed loop	SPDT
3"	1042TW	1044TW
1 1/4 "	1045T	1047T

Color	Natural	Mahogany brown
Quantity		5



1045T-M



100% TESTED




0 46188 01247 3

## 1045T Series Magnetic Contacts Industrial Surface Mount With Terminals

### Installation Instructions

**1042TW, 1044TW, 1045T, 1047T**

Select desired mounting positions for contact and magnet. Align labels on contact and magnet so labels read in same direction.

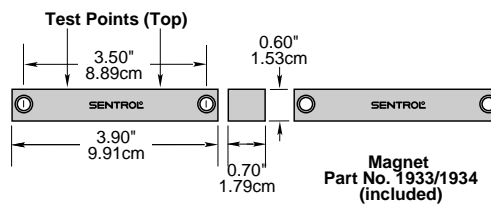

### UL Specifications

\*\* European Union Specification: 48 VAC/DC Max., 0.5 Amp

Part Number	Loop Type	Electrical Configuration	Gap Distance Make*
1042TW	Closed	N.O.	3"
1044TW	Open or Closed	SPDT	3"
1045T	Closed	N.O.	1 1/4"
1047T	Open or Closed	SPDT	1 1/4"

\*\*FORM A (1042TW, 1045T)

Voltage: 100 VAC/DC Max

Current: 0.5 A Max

Power: 7.5 W Max

FORM C (1044TW, 1047T)

Voltage: 30 VAC/DC Max

Current: 0.25 A Max

Power: 3.0 W Max

\* Gap Specifications are nominal and may vary  $\pm 20\%$ . Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

### ULC Specifications

All Contacts: 30 VDC, 50 ma max.

Gap Specifications:\*

See UL Gap Specifications



PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.

Interlogix, Caddx, ESL, ITI and Sentrol are trademarks of Interlogix, Inc.

PK-0999 Rev F 10/01