

1125 series recessed magnetic contacts

recessed stubby press fit magnetic contacts with wire leads
3/8 in. dia.

The 1125 series stubby press fit magnetic contact is a 3/8-inch diameter switch designed specifically for applications where space is limited.

The 1125's short length makes it ideal for thin-framed windows and doors where longer units cannot be used. Press fit ribs on the housing make installation quick and easy.



Specifications


Voltage:	100 VAC/VDC max.
Current:	0.5 A max.
Power:	7.5 W max.
Loop type:	Closed
Electrical configuration:	Normally open
Gap distance:	1125: Up to 1/4 in. 1125W: Up to 3/4 in. 1125WB: Up to 1-3/8 in.
Lead type:	1 ft. #22 wire
Dimensions:	1125: 0.75 in. L x 0.375 in. dia. (19 x 9.5 mm) 1125W: 1.25 in. L x 0.375 in. dia. (32 x 9.5 mm) 1125WB: 0.75 in. L x 0.375 in. dia. (19 x 9.5 mm)
Housing:	Flame retardant ABS plastic
Color:	White or mahogany brown (1125 only)

Ordering information

1125N-10PKG (-50BOX)	Recessed stubby press fit magnetic contact with wire leads, 3/8 in. dia., 1/4 in. gap size, white, pk/10 (pk/50 -50BOX)
1125M-10PKG	Recessed stubby press fit magnetic contact with wire leads, 3/8 in. dia., 1/4 in. gap size, mahogany brown, pk/10
1125WN-10PKG	Recessed stubby press fit magnetic contact with wire leads, 3/8 in. dia., 3/4 in. gap size, white, pk/10
1125WBN-10PKG	Recessed stubby press fit magnetic contact with wire leads, 3/8 in. dia., 1-3/8 in. gap size, bare neodymium magnet, pk/10
1946N-10PKG	Magnet for 1125 series, white, pk/10

- Press fit design makes installation easy—no screws or glue needed
- Small size perfect for thin-framed windows and doors
- Good for use in vinyl-clad and custom windows
- Ideal for pre-wiring; eliminates forcing switch and pre-wire into the same header hole
- Available wider gap distance helps prevent false alarms caused by loose-fitting doors and windows

1125

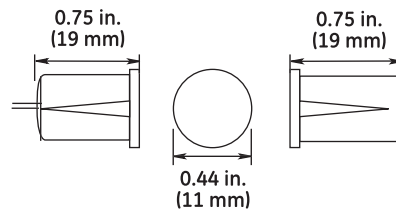

1125W

