


VT/VR7400-2DRDT Series

IFS 4-Channel Digitally Encoded Video and 2 Bi-Directional Data Multiplexer

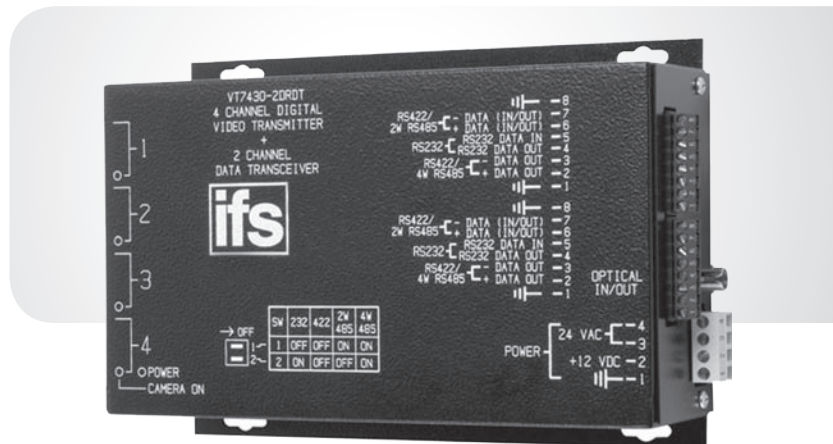


OVERVIEW

The IFS VT/VR7400-2DRDT Series video transmitter/data transceiver and video receiver/data transceiver series utilizes state-of-the-art 8-bit digital encoding and decoding for high-quality video transmission that exceeds the requirements of EIA RS-250C for Medium-Haul Video Transmission. These environmentally hardened units provide transmission of four independent video channels and two bi-directional data channels over one optical fiber and are ideal for use in unconditioned roadside or out-of-plant installations. Completely transparent to and universally compatible with any NTSC, PAL, or SECAM CCTV camera system. Data channels can be set independently for RS-232, RS-422 and 2 or 4-wire RS-485 with tri-state support. Plug-and-play design ensures ease of installation and no electrical or optical adjustments are ever required. LED indicators are provided for rapidly ascertaining equipment operating status, and these units are available in either stand-alone or rack mount.

APPLICATION EXAMPLES

- High Performance CCTV with PTZ Control
- High Performance CCTV with Access Control

SYSTEM DESIGN

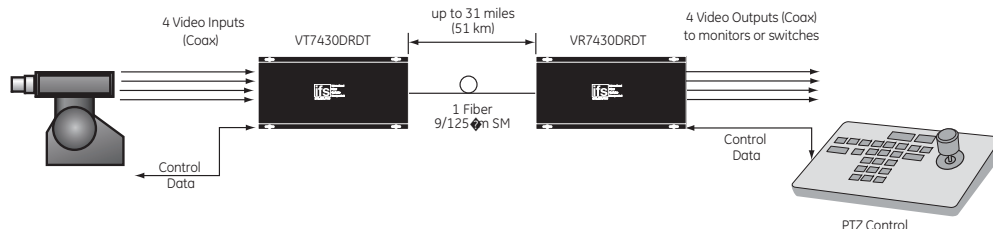

STANDARD FEATURES

- 8-Bit Digitally Encoded Video Transmission Transmits 4 Real-Time Color Video Signals and 2 Bi-Directional Data Signals on One Single Mode Optical Fiber
- Supports RS-232, RS-422, and 2 or 4-wire RS-485 with Tri-State Data Interfaces
- LED Status Indicators Provide Rapid Indication of Critical Operating Parameters
- Exceeds All Requirements for RS-250C Medium-Haul Transmission: Extremely High Video Performance
- Exceptionally Low Video Distortion with Zero Performance Variation vs. Optical Path Loss
- Ideally Suited to Networks Requiring Multiple Physical Layers where Video Degradation May be a Problem
- Directly Compatible with All NTSC, PAL, or SECAM CCTV Camera Systems
- Tested and Certified by an Independent Testing Laboratory for Full Compliance with the Environmental Requirements (Ambient Operating Temperature, Mechanical Shock, Vibration, Humidity with Condensation, High-Line/Low-Line Voltage Conditions and Transient Voltage Protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Robust Design Ensures Extremely High Reliability In Unconditioned Out-of-Plant Environments
- Solid-State Current Limiters on All Power Lines Provide Unconditional Equipment Protection
- Comprehensive Lifetime Warranty

VT/VR7400-2DRDT Series

North America
T 855-286-8889

Latin America
T 561-998-6114

IFS 4-Channel Digitally Encoded Video and 2 Bi-Directional Data Multiplexer

Ordering Information

	Part Number	Description	Fibers Required	Optical Pwr. Budget	Max. Distance*
Multimode 62.5/125µm**	VT7420-2DRDT	4-Channel Video Transmitter/Data Transceiver (1310/1550 nm)	1	18 dB	1.2 miles (2 km)***
	VR7420-2DRDT	4-Channel Video Receiver/Data Transceiver (1310/1550 nm)	1	18 dB	1.2 miles (2 km)***
Single Mode 9/125µm	VT7430-2DRDT	4-Channel Video Transmitter/Data Transceiver (1310/1550 nm)	1	17 dB	31 miles (51 km)
	VR7430-2DRDT	4-Channel Video Receiver/Data Transceiver (1310/1550 nm)	1	17 dB	31 miles (51 km)
Accessories ♦	PS-12VDC	12 Volt DC Plug-in Power Supply (Included)			
Options		Add '-R3' to Model Number for R3 Rack Mount - No Charge (Requires R3 Rack purchased separately)			

*Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.

Distance can also be limited by fiber bandwidth. **For 50/125 Fiber, subtract 4 dB from Optical Power Budget.

*** This product may be used with 62.5µm graded index multimode fiber having a maximum run length of 2 km and/or a maximum optical loss budget of 10 dB.

♦ All accessories are third party manufactured.

Specifications

Video

Video Input:	1 Volt pk-pk (75 ohms)
Input/Output Channels:	4
Bandwidth:	10 Hz - 6.5 MHz per channel
Differential Gain:	<2%
Differential Phase:	<0.7°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	60 dB @ Maximum Optical Loss Budget

Data

Data Channel:	2
Data Format:	RS-232, RS-422, 2-w or 4-w RS-485 with Tri-State, Manchester, Bi-Phase

Wavelength

1310/1550 nm, Multimode or Single Mode

Optical Emitters

Laser Diode

Number Of Fibers

1

Connectors

Optical:	ST
Power:	Terminal Block with Screw Clamps
Video:	BNC (Gold Plated Center-Pin)

Electrical & Mechanical

Power:	12 VDC @ 500 mA (stand-alone)
Number of Rack Slots:	3
Current Protection:	Automatic Resettable Solid-State Current Limiters
Circuit Board:	Meets IPC Standard
Size (in./cm.) (LxWxH)	
Surface Mount (Transmitter):	7.0 x 4.9 x 2.0 in., 17.8 x 12.5 x 5.1 cm
Surface Mount (Receiver):	7.0 x 4.9 x 3.0 in., 17.8 x 12.5 x 7.5 cm
Rack Mount:	7.7 x 5.0 x 3.0 in., 19.6 x 12.7 x 7.5 cm
Shipping Weight:	< 2 lbs./0.9 kg

Environmental

MTBF:	> 100,000 hours
Operating Temp:	-40° C to +74° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)

Agency Compliance

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J



interlogix.com

Specifications subject to change without notice.

© 2014 United Technologies Corporation

All rights reserved.

Interlogix is part of UTC Building & Industrial Systems, a unit of United Technologies Corporation.

VT/VR7400-2DRDT Series