networX
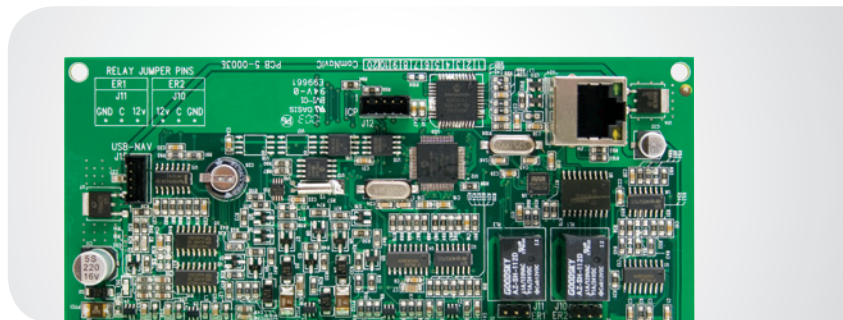
NetworX IP Communication Module

OVERVIEW

The Interlogix® NetworX IP Communication Module enables remote management and alarm reporting for NetworX version two (V2) security panels. This module communicates over the internet via an Ethernet connection and can be configured for alarm reporting over IP when Public Switch Telephone Network (PSTN) connectivity is not available. Alternatively, the NetworX panel can utilize PSTN for failover connectivity if the IP communications path is lost.

The NetworX IP Communication Module interfaces with the Interlogix UltraSync™ application and enables remote management of NetworX security panels from iOS® and Android® devices. The NetworX IP Communication Module can also be configured through a web browser from a local computer, smart phone or tablet.

STANDARD FEATURES

- Alarm reporting over IP (Ethernet)
- Remote management through the UltraSync application for iOS and Android devices
- Two output relays controllable with the UltraSync application
- Two hard-wired inputs, expandable to four when doubled*
- DLX900 upload/download support
- Configurable email alerts
- Network time synchronization
- Installs inside NetworX enclosure
- Utilizes existing panel power

 * Feature not available on NX-4 panels.

Specifications

General

Compatibility	Interlogix NetworX V2 control panels (NX-4, NX-6, NX-8, NX-8E)

Electrical

Operating Voltage	12VDC, supplied from control panel
Current Draw	250mA (nominal), 320mA (both relays energized)

Environmental

Operating Temperature	32°F~120°F (0°C~49°C)
Storage Temperature	-30°F~120°F (-34°C~49°C)
Maximum Humidity	90% relative humidity non-condensing

Physical

Dimensions (WxH)	3.2 x 6.0 in. (81 x 152mm)

Ordering Information

NX-595E	NetworX IP Communication Module

interlogix

United Technologies

interlogix.com

506-3943   2015/09   (82347)