



SENTROL

1082 Series Screw Mount with Leads

Magnetic Contacts

Gap distance	Closed loop	Open loop	SPDT
1"	1082		
2"		1083W	1084W
3/4"			1084D DPDT
Color	Natural	Mahogany brown	Grey
Quantity	10		



1082-N



100% TESTED



1082 Series Screw Mount with Leads Magnetic Contacts


Installation Instructions

1082, 1083W, 1084D, 1084W

Select desired mounting positions for switch and magnet. For wide gap switches align labels on switch and magnet so labels read in the same direction (switches are polarity sensitive). Attach with mounting screws included.

Lead Colors on SPDT

Black: Common
White: Closed Loop
Red: Open Loop

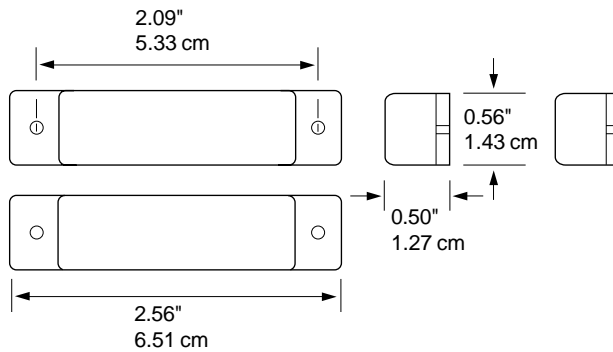

**Magnet
Part No. 1080-T
(included)**

UL Specifications

**European Union Specifications: 48 VAC/DC Max., 0.5 Amp

Part Number	Loop Type	Electrical Configuration	Gap Distance
1082	Closed	N.O.	1"
1083W	Open	N.C.	2"
1084D	Open or Closed	DPDT	3/4"
1084W	Open or Closed	SPDT	2"

**FORM A (1082)

Voltage: 100 VAC/DC Max
Current: 0.5 A Max
Power: 7.5 W Max

FORM B (1083W)

Voltage: 30 VAC/DC Max
Current: 0.25 A Max
Power: 3.0 W Max

FORM C (1084D, 1084W)

Voltage: 30 VAC/DC Max
Current: 0.25 A Max
Power: 3.0 W Max

ULC Specifications

All Contacts: 30 VDC, 50 ma max. Gap Specifications:*
See UL Gap Specifications

interlogix
SECURITY & LIFE SAFETY GROUP

PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.

Interlogix, Caddx, ESL, ITI and Sentrol are
trademarks of Interlogix, Inc.

14096 REV B 11/01